

PMT-RPT-S Repeater



Features

- *Plug & Play, no Programming Required*
- *Fully support base Camera Link cameras / Frame grabbers*
- *Pixel Clock : 20 to 85 MHz*
- *Single 5V ~ 24V DC power supply*
- *Connector Type : SDR26 (Mini Camera Link)*
- *Compact size – 85.8L × 57.13W × 23H mm*

Introduction

Mini Camera Link Repeater

Specification


General Specification

Operating Temperature	0 ~ 70 °C			
Input Voltage	DC 5 ~ 24 V			
Supply Current @ 12V	Base	Typ. 0.05A	Full	Typ. 0.1A
Power Consumption @25 °C	Base	Typ. 0.6W	Full	Typ. 1.2W
AC/DC Power Supply Connector	Micro-USB type B (5 pins)			
Weight (approx)	Base	100 gram	Full	100 gram

Camera Link Interface

Pixel Clock	20 to 85MHz
Supported Camera Link Configuration	Base/Dual Base/Medium/Full/Extended Full
Image Enables	FVAL, LVAL, DVAL, spare
Camera Control	CC1, CC2, CC3, CC4
Communication	SerTC, SerTFG
Connector Type	SDR26 receptacle (Mini Camera Link)

Dimension

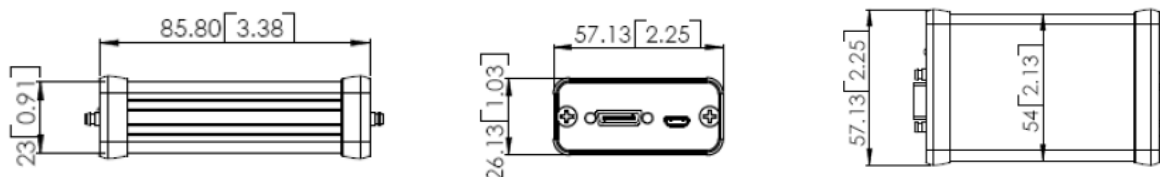

Unit : mm[inch]

127-5 DEAD0 NAM-GU POHANG-CITY GYOUNGBUK KOREA

Tel.+82-54-283-5921 Fax..+82-54-274-2819

PALMA TECHNOLOGY CO.,LTD.

Web: <http://www.palmatech.co.kr> E-mail: info@palmatech.co.kr